

Contar	Descripción
--------	-------------


1	<p>HYDRO MPC-E 5 CR64-4-2</p>  <p style="text-align: center;">Adverta! la foto puede diferir del actual producto</p> <p>Código: 96941450</p> <p>Pressure booster system supplied as compact assembly according to DIN standard 1988/7. All pumps are speed-controlled.</p> <p>The booster system is equipped with CR pumps connected to external Grundfos CUE frequency converters (one per pump).</p> <ul style="list-style-type: none"> * Hydro MPC-E maintains a constant pressure through continuous adjustment of the speed of the pumps. * The system performance is adapted to the demand through cutting in/out the required number of pumps and through parallel control of the pumps in operation. * Pump changeover is automatic and depends on load, time and fault. * All pumps in operation will run at individual speeds. <p>The system consists of these parts:</p> <ul style="list-style-type: none"> * Pump parts in contact with the pumped liquid are made of stainless steel EN DIN 1.4301. * Pump bases and heads are of cast iron EN-GJS-500-7 (CR), other vital parts are made of stainless steel EN DIN 1.4301. * The pumps are equipped with a service-friendly cartridge shaft seal, HQQE (SiC/SiC/EPDM). * Two manifolds of stainless steel EN DIN 1.4571. * Base frame of stainless steel EN DIN 1.4301 up to CR 64. Above CR 64 the pumps are placed on a galvanized C-profile frame. * One non-return valve (POM) and two isolating valves for each pump. * Non-return valves are certified according to DVGW, isolating valves according to DIN and DVGW. * Adapter with isolating valve for connection of diaphragm tank. * Pressure gauge and pressure transmitter (analog output 4-20 mA). * Control MPC in a steel cabinet, IP 54, including main switch, all required fuses, motor protection, switching equipment and microprocessor-controlled CU 352. <p>Dry-running protection and diaphragm tank are available according to the list of accessories.</p> <p>Pump operation is controlled by Control MPC with the following functions:</p> <ul style="list-style-type: none"> * Intelligent multipump controller, CU 352. Constant-pressure control through continuously variable adjustment of the speed of each individual pump. PID controller with adjustable PI parameters (Kp + Ti). Constant pressure at setpoint, independent of inlet pressure. Soft pressure build-up (To prevent water hammer during startup). On/off operation at low flow. Automatic cascade control of pumps for optimum efficiency. Selection of min. time between start/stop, automatic pump changeover and pump priority. Automatic pump test function to prevent idle pumps from seizing up. Possibility of standby pump allocation. Possibility of backup sensor (redundant primary sensor). Secondary sensor (Possible to switch to another sensor/setpoint). Multi-sensor (up to 6 sensors to influence the setpoint). Manual operation. Possibility of external setpoint influence.
---	--








Contar	Descripción														
	<p> Log function. Setpoint ramp. Possibility of digital remote-control functions: System on/off. Max., min. or user-defined duty. Up to 6 alternative setpoints. Digital inputs and outputs can be configured individually. Pump and system monitoring functions: Minimum and maximum limits of current value. Inlet pressure. Motor protection. Sensors and cables monitored for malfunction. Alarm log with the previous 24 warnings/alarms. Display and indication functions: Colour screen display. Green indicator light for operating indications and red indicator light for fault indications. Potential-free changeover contacts for operation and fault. Grundfos bus communication. </p> <p> It is possible to add CIM communication modules for communicating with Scada/BMS. </p> <table data-bbox="225 985 718 1209"> <tr> <td>Fluido:</td> <td>Agua</td> </tr> <tr> <td>Presión max. del sistema:</td> <td>16 bar</td> </tr> <tr> <td>Caudal (Instalación):</td> <td>510 m³/h</td> </tr> <tr> <td>Alimentación:</td> <td>380-415 V</td> </tr> <tr> <td>Corriente nominal instalación:</td> <td>330,6A-400V</td> </tr> <tr> <td>Potencia nominal:</td> <td>37 kW</td> </tr> <tr> <td>Peso neto:</td> <td>2710 kg</td> </tr> </table> <p> Maximum head: 144 m Maximum flow: 510 m³/h </p>	Fluido:	Agua	Presión max. del sistema:	16 bar	Caudal (Instalación):	510 m ³ /h	Alimentación:	380-415 V	Corriente nominal instalación:	330,6A-400V	Potencia nominal:	37 kW	Peso neto:	2710 kg
Fluido:	Agua														
Presión max. del sistema:	16 bar														
Caudal (Instalación):	510 m ³ /h														
Alimentación:	380-415 V														
Corriente nominal instalación:	330,6A-400V														
Potencia nominal:	37 kW														
Peso neto:	2710 kg														




96941450 HYDRO MPC-E 5 CR64-4-2 50 Hz

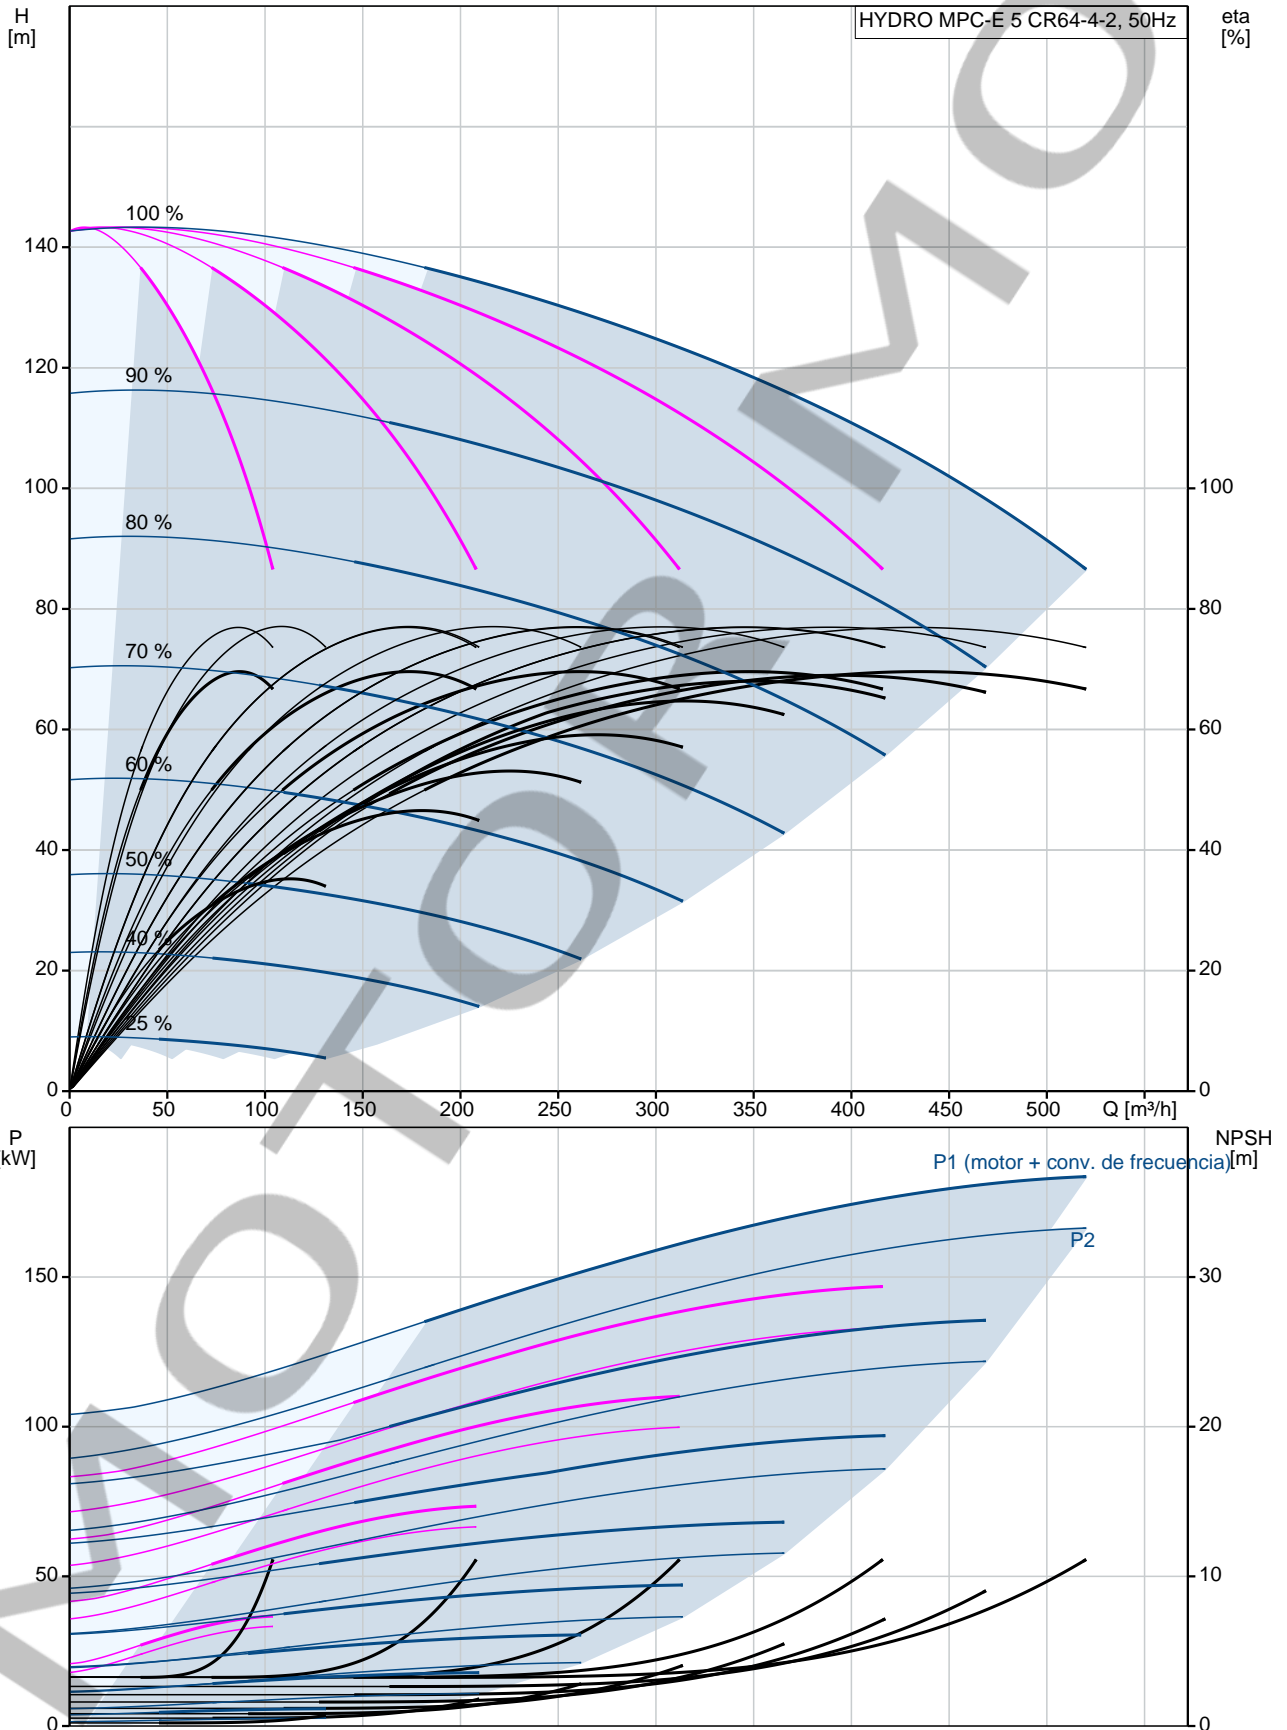

Descripción	Valor
Información general:	
Producto::	HYDRO MPC-E 5 CR64-4-2
Código::	96941450
Número EAN::	5700314239800
Técnico:	
Caudal nominal:	385 m ³ /h
Caudal máx.:	510 m ³ /h
Altura nominal:	111.3 m
Altura máx.:	144 m
Nombre de la bomba principal:	CR64-4-2
Bomba princ. n.º:	96123690
Número de bombas:	5
Válvula antirret.:	lado descarga
Materiales:	
Colectores:	EN/DIN 1.4571/ AISI 316 TI
Instalación:	
Presión de trabajo máxima:	16 bar
Presión de entrada máxima permitida:	1.6 bar
Entrada de colector:	DN200
Salida de colector:	DN200
Presión nominal:	PN16
Toma de tierra:	PE
Diseño del sistema:	C
Líquido:	
Líquido bombeado:	Agua
Rango de temperatura del líquido:	5 .. 60 °C
Temperatura del líquido durante el funcionamiento:	20 °C
Densidad:	998.2 kg/m ³
Datos eléctricos:	
Potencia (P2) bomba principal:	37 kW
Frecuencia de red:	50 Hz
Tensión nominal:	3 x 380-415 V
Intensidad nominal del sistema:	330,6A-400V
Tipo de arranque:	S/D
Grado de protección (IEC 34-5):	IP54
Supresión de radiointerferencias:	EMC DIRECTIVE(2014/30/EU)
Paneles control:	
Control type:	E
Dry running protection, mechanical:	NONE
Depósito:	
Depósito de membrana:	No
Otros:	
Peso neto:	2710 kg
Peso bruto:	2840 kg
Gama de productos:	Internacional
Fichero de configuración Control MPC:	98271949
Fichero de configuración Hydro MPC:	98272018

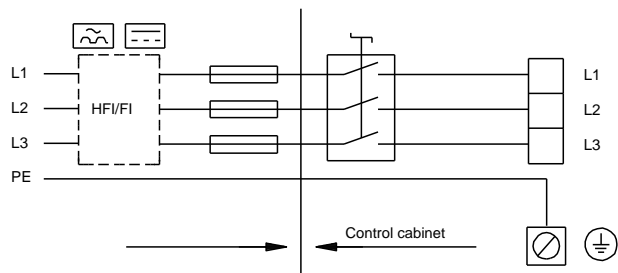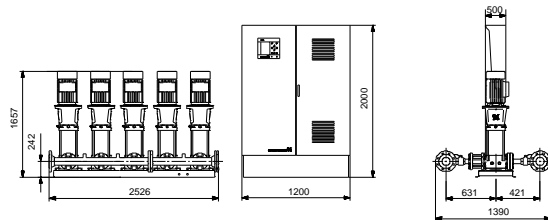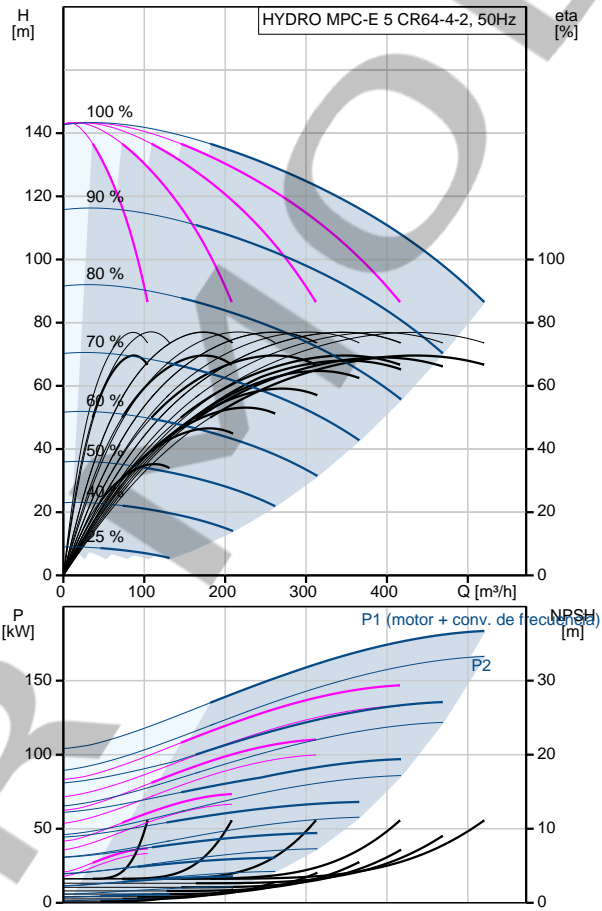

96941450 HYDRO MPC-E 5 CR64-4-2 50 Hz

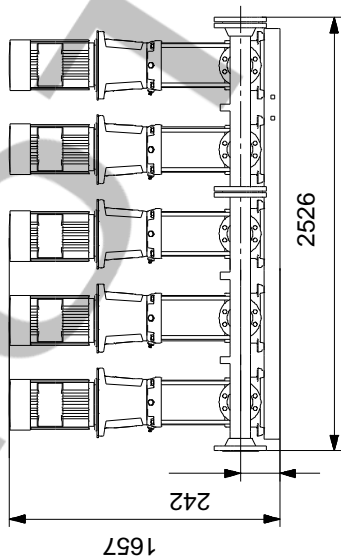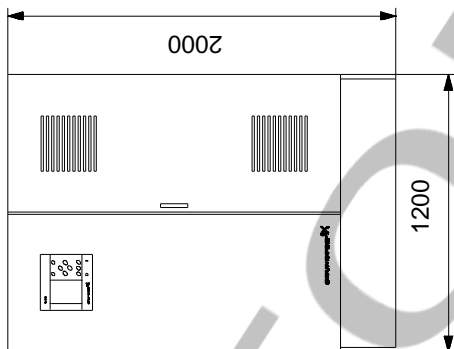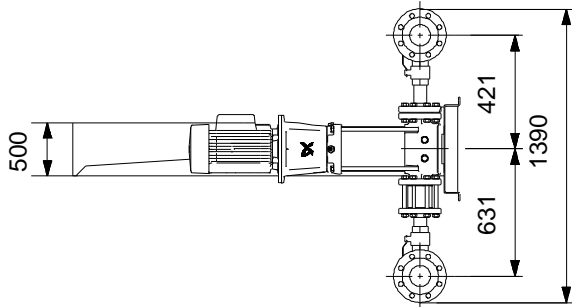

Nota: Todas las unidades están en [mm] a menos que se indiquen otras. Exención de responsabilidad: este esquema dimensional simplificado no muestra todos los detalles.

96941450 HYDRO MPC-E 5 CR64-4-2 50 Hz



¡Nota! Uds en [mm] a menos que otras estén expresadas