

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122627

Model :

DIVERTRON X 1200 M

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure :

Hydraulic data (duty point)

Flow :

Head :



Materials

Pump body	Technopolymer
Impeller	Technopolymer
Diffuser	Technopolymer
OR ring	NBR
Suction filter	Stainless Steel AISI 304
Motor shaft	AISI 416
Motor casing	Aluminium

Motor data

Motor brand :	DAB	
Nominal power P2 :	0,75 kW	
Rated voltage :	1~ 220-240 V	50 Hz
Nominal current :	4,8 A	
Number of poles :	2	
Rated speed :	2800 1/min	
Degree of protection :	IP X8	

Curve tolerance according to ISO 9906

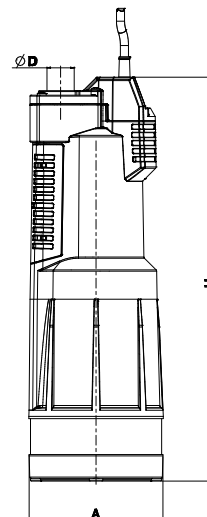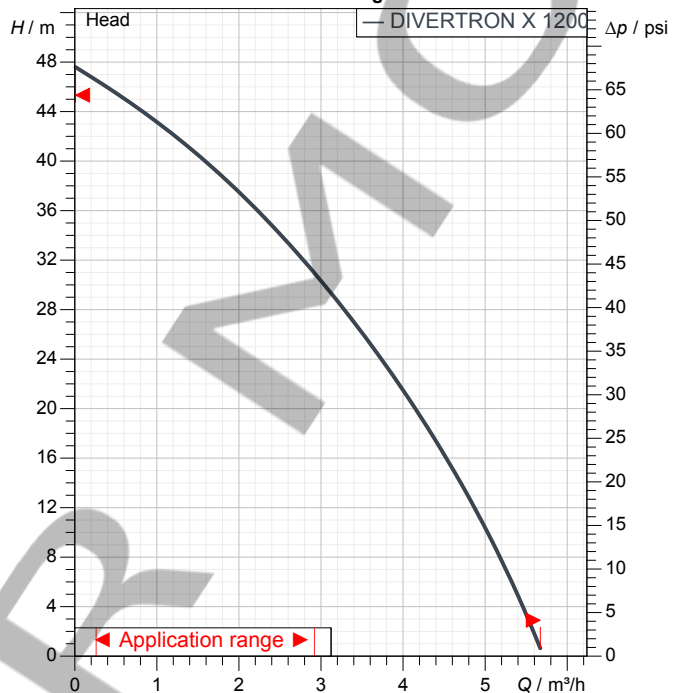

Weight : 11 kg

Dimensions in mm

A	150				
D	30				
H	480				

Pump connection

Suction side : /
Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON X 1200 M

Curve tolerance according to ISO 9906

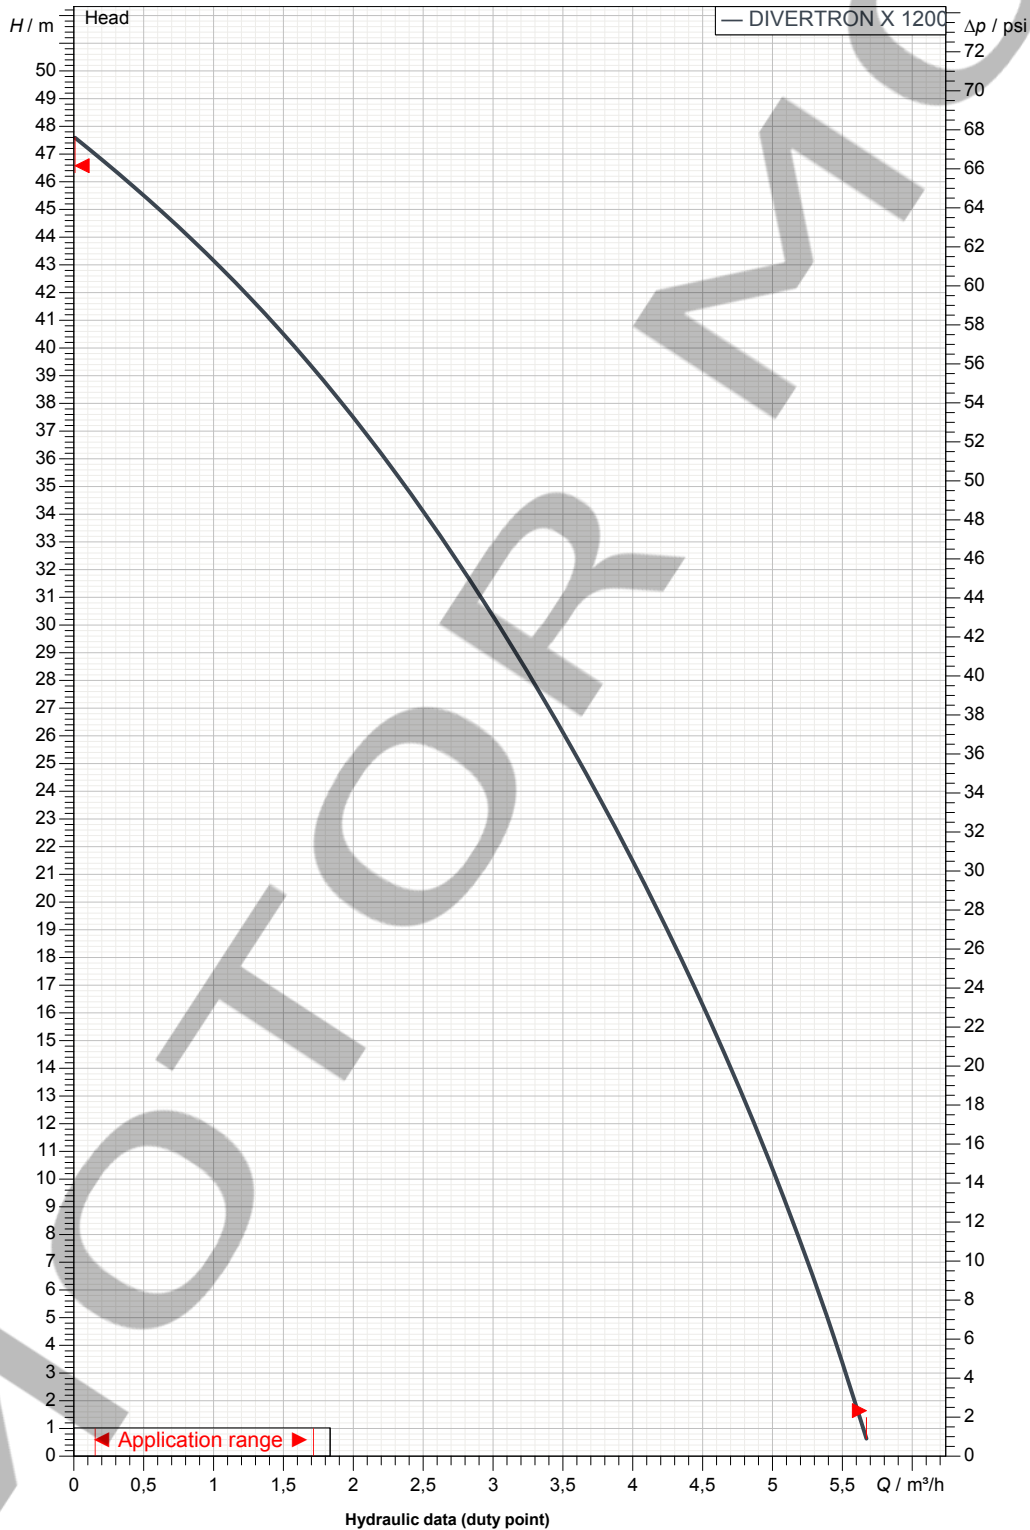

Suction side :

Discharge side :

Flow :

Head :

Rated speed :
2800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE



DIMENSIONAL DRAWING

03/08/2015

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON X 1200 M

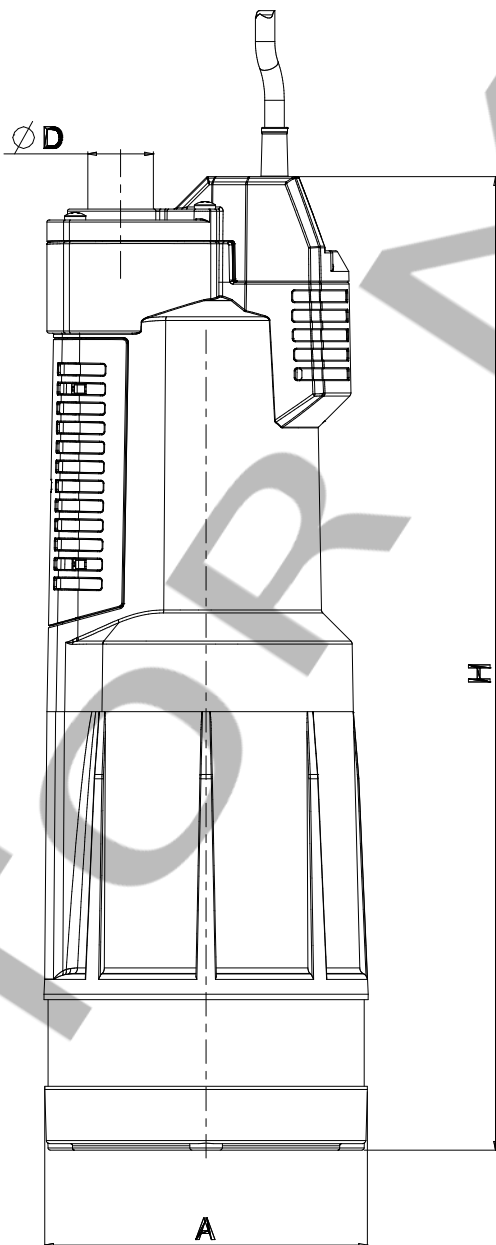

Dimensions in mm

Pump connection

1
2
3

A
D
H

150
30
480

Suction

Discharge

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE